



GimaGO




G0134B/C

net 
NEW ELECTRONIC TECHNOLOGY

AUDIOVIDEO SUPPLY

1-800-284-2288 sales@avsupply.com
www.avsupply.com

For design help, accessories or pricing, please contact:
sales@avsupply or call: 1-858-565-1101

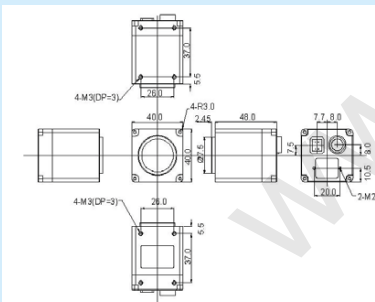

- Machine vision
- Quality control
- Microscopy + Medical
- Factory automation
- Semi con inspection
- Barcode, OCR, OCV



	G0134B	G0134C
Resolution(H x V) [px]	659 x 494 / VGA	
Sensor	CCD	
Image sensor	ICX414AL	ICX414AQ
Sensor size	1/2"	
Pixel size [μm]	9.90 x 9.90	
Frame rate [fps]	86	
Shutter speed	1 μs - 3600 s	
Data path	for b/w model: 8 bit or 12 bit for color model: 8 bit or 12 bit Raw RGB + YUV422/YUV411	
Binning	for b/w model: 2x2 for color: not supported	
Partial scan	Unit: 4 x 4	
Trigger	external / software	
Strobe	normal / trigger	
Gain [dB]	0 - 18 (manual or auto)	
Lens	C- / CS-mount	
Scanning system	progressive scan	
Control function	for b/w: brightness, sharpness, gamma, auto-exposure, auto-gain, auto-shutter for color: brightness, sharpness, gamma, auto-exposure, auto-gain, auto-shutter, U/B, V/R, Hue/G (digital gain), auto white balance	
Feature save/load	9 channels (0: factory, 1-4: feature, 5-8: mode/feature)	
S/O (RS-232)	path through or NET command	
S/N ratio [dB]	> 56	
Interface	GigE vision interface according to GigE vision standard / 1 Gbps	
Operating temperature	-5 to +45° C	
Dimension (WxHxD) [mm]	40 x 40 x 48	
Regulations	FCC, CE, RoHS	
Power consumption	+8 V DC to +30 V DC	
Advanced features	auto iris lens control	

NET Japan Co., Ltd.
2F Shin-Yokohama 214 Bldg.
2-14-2 Shin-Yokohama, Kohoku-ku,
Yokohama-shi, 222-0033, Japan
Tel: +81 45 478 1020
Fax: +81 45 476 2423
info@net-japan.com
www.net-japan.com