




Distributed By: Audio Video Supply -- Tel: 1-800-284-2288 -- www.avsupply.com

RL3940 Apposelite



- Ai** Low angle illumination in a compact 100mm diameter housing.
- Ai** Solves a wide array of imaging problems where low angle of incidence, radial illumination is required.

Ordering Information

Standard Product:
Shipped Next Day

Standard Product Variation:
Shipped Within Two Weeks


RL3940-660

Configured for use with Ai
Power Supply

Optimal working distance:

12.7mm (.5")
up to 152.4mm (6")

Version "B" Mounting Option



RL3940

X

B

Spectral wavelength
XXX
(UV) 395
(blue) 470
(green) 520
(yellow) 590
(orange) 625
(red) 660
(infra-red) 880
(white) WHI

Optional power
Compatibility

XX

IC

IS

C2

C3

C5

24

Alternative
Connector

XXX

M12*

(IS: 5-pin male;
IC/24: 4-pin male)

IC = iCS (requires 24v power supply)

IS = ISU (24 volt PS required.)

C2 = Ai Connector

C3 = Pulsar 710 Connector


C5 = Pulsar 320 Connector

* Available with IC, IS, and 24v options only

◇ UV LEDs have a considerably shorter half-life than other LEDs (<1000hrs). For this reason Ai recommends these LEDs be used in strobe mode only. For applications requiring continuous 24v power, contact Ai for assistance.

Dimensional Information

Click for Installation
Models & Drawings

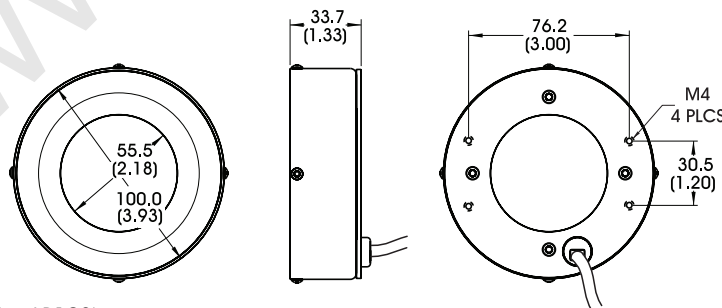

Includes Mounting Bracket (Part # LB108)

Cable Length: 1.5 Meter (59")

DIMENSIONS ARE IN MILLIMETERS (INCHES)

Standard Variation Current Specifications

	blue	green	yellow	orange	red	infra-red	white	
@24	280	280	120	120	180	240	280	mA

Standard Product Information

Finish: Black Anodized

Operating Temperature: 0-60° C

Meets Specifications: CE, RoHS

LED products provide a lifespan significantly greater than other vis

advancedillumination.com

For design help, accessories or pricing, please contact:
sales@avsupply or call: 1-858-565-1101

AUDIO VIDEO SUPPLY
1-800-284-2288 sales@avsupply.com
www.avsupply.com